Unique Document # SAB2000877600 00 cy. 4

SANDIA REPORT

SAND90—0789 • UC—705
~~Export Control Information~~
Printed January 1991

Enclosure 1: #53

Coupled Bending/Lateral Load Modeling of Earth Penetrators

SNLA LIBRARY
8 3 5 1 0 1
SAND90-0789
0004
UNCLASSIFIED
01/91
24P
STAC

Donald B. Longcope, Jr.

Prepared by
Sandia National Laboratories
Albuquerque, New Mexico 87185 and Livermore, California 94550
for the United States Department of Energy
under Contract DE-AC04-76DP00789

WARNING This document contains technical data whose export is restricted by the Arms Export Control Act (22 USC 2751 et seq) or the Export Administration Act of 1979, as amended (50 USC 2401 et seq). Violations of these export laws are subject to severe civil and criminal penalties.

DEPARTMENT OF ENERGY DECLASSIFICATION REVIEW
FIRST REVIEW-DATE: 9/24/05
AUTHORITY: DC DD
NAME: Nancy Connelly
SECOND REVIEW-DATE: 7/9/07
AUTHORITY: DD
NAME: Eric Hofer
DETERMINATION (CIRCLE NUMBER(S))
1. CLASSIFICATION RETAINED
2. CLASSIFICATION CHANGED TO:
3. CONTAINS NO DOE CLASSIFIED INFO
4. CONCURS WITH:
5. CLASSIFICATION CANCELED
6. CLASSIFIED INFO BRACKETED
7. OTHER (SPECIFY): DOD brackets (MCTL)
per letter dtd. 10/2/97

8776

95SA20000277

Issued by Sandia National Laboratories, operated for the United States Department of Energy by Sandia Corporation.

NOTICE: This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government, any agency thereof or any of their contractors or subcontractors. The views and opinions expressed herein do not necessarily state or reflect those of the United States Government, any agency thereof or any of their contractors.

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

Wood 5142

DOD b(1)
GIF

DOD MAD
DIF

DOD b(1)
DI F

DOD WO
NO 1

DOD b(1) OIF

SAND90-0789
Export Control Information
Printed January 1991

Distribution
Category UC-705

COUPLED BENDING/LATERAL LOAD MODELING OF EARTH PENETRATORS

Donald B. Longcope, Jr.
Structural Dynamics Division
Sandia National Laboratories
Albuquerque, New Mexico 87185

ABSTRACT

A procedure has been developed to calculate the distributed forces on a penetrator and its motion for an oblique impact with a geological target. Coupling between the lateral forces and bending of the penetrator is accounted for. The penetrator is modeled as a beam of variable stiffness with the general analysis code ABAQUS, and the loading is determined in a DLOAD subroutine that uses previously developed results for the pressure required to expand either a cylindrical or spherical cavity in the target. Results are calculated for a standard Davis Gun penetrator entering antelope tuff at either a 2° angle of attack or a 30° angle of incidence. The lateral acceleration of a Pershing-II penetrator is calculated and compared with data recorded in a field test. The ABAQUS/cavity expansion procedure can be applied to phase 3 penetrator development and testing to predict the trajectory, structural response, and component shock response.

WARNING This document contains technical data whose export is restricted by the Arms Export Control Act (22 USC 2751 et seq) or the Export Administration Act of 1979, as amended (50 USC 2401 et seq). Violations of these export laws are subject to severe civil and criminal penalities.

ACKNOWLEDGMENT

The author thanks Mike Hightower (9122) for helpful contributions to this work.

CONTENTS

Introduction 7

ABAQUS Structural Model of a Penetrator 8

Specification of Distributed Loading via Cavity-Expansion Results 11

Results for the Standard Davis Gun Penetrator 12

Calculated and Measured Acceleration 17

Conclusions 21

References 22

Appendix - Kinematics 23

Distributed Forces on the Aft Body 25

Distributed Forces on the Nose 28

Use of Spherical Cavity Expansion Results to Specify Distributed Loading 33

FIGURES

1. Geometry of an Oblique Impact 8

2. Structural Model of the Standard Davis Gun Penetrator 10

3. Expanding Cylindrical Cavity and Surrounding Response Regions..... 10

4. Cylindrical Cavity Expansion Stress in Antelope Tuff..... 12

5. Centerline Configuration of Standard Davis Gun Penetrator at Various Times for 14

6. Distributed Lateral Load on the Standard Davis Gun Penetrator 15

7. Lateral Loading on Flexible and Rigid Models of the Standard Davis Gun Penetrator for 15

8. Lateral Loading on Flexible and Rigid Models of the Standard Davis Gun Penetrator for 16

9. Lateral Loading on Flexible and Rigid Models of the Standard Davis Gun Penetrator for α = ... 16

10. Penetrator Centerline Configuration at Various Times for 18

11. Distributed Lateral Load on the Standard Davis Gun 19

12. 19

13. 20

14. Geometry for Specifying Loading on an ABAQUS B21 Element 24

15. Radial Cavity Expansion Velocity Produced by the Penetrator Nose 29

TABLES

1. Parameters of the Structural Model of the Standard Davis Gun Penetrator..... 9

2. Distributed Lateral Load on the Aft Body..... 27

3. Distributed Lateral and Axial Loads on the Nose..... 31

INTRODUCTION

A procedure has been developed for calculating the lateral loading on an earth penetrator, its bending response, and its trajectory in an oblique penetration event, such as in Figure 1. If either the angle of attack α or the angle of incidence β are nonzero, lateral loads will be generated. The target and penetrator motion will be three-dimensional. One approach is to treat the target/penetrator interaction with a continuum dynamics code such as PRONTO 3D, [1,2].

The present approach couples the lateral loading and penetrator bending. It determines both quantities in one calculation by using the general purpose structural code ABAQUS with a dynamic load (DLOAD) subroutine that specifies the lateral loading via either cylindrical or spherical cavity expansion model theory. A previous benchmark study [6] showed that 1D cavity expansion modeling [7] gives good comparisons with field test measurements for the axial loading on full-scale penetrators into antelope tuff. The nonlinear geometry (NLGEOM) option in the ABAQUS solution procedure is chosen to allow for finite rotations of the structural elements if the penetrator trajectory is highly curved.

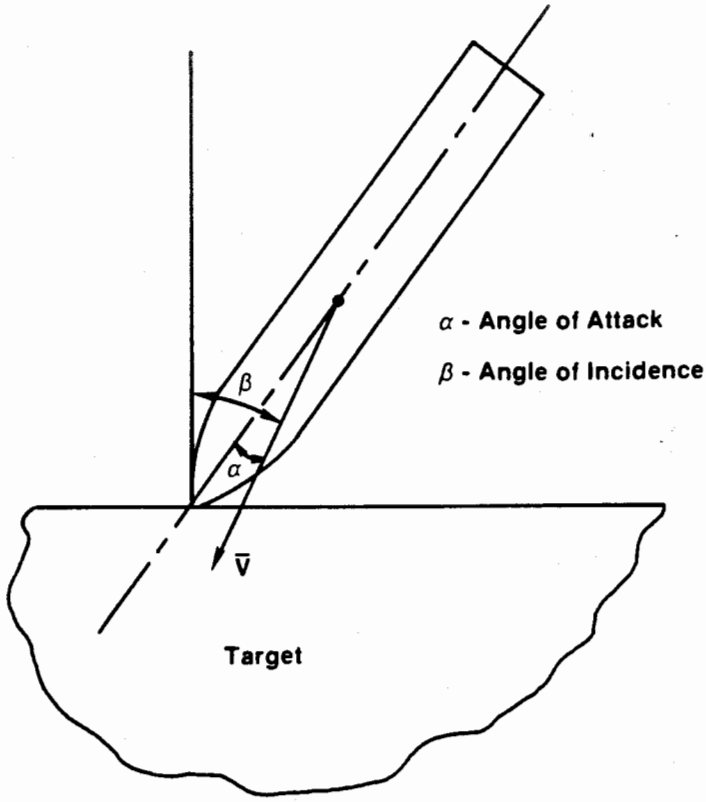

Figure 1. Geometry of an Oblique Impact.

The trajectory, lateral loading, and effect of bending on the lateral loading have been calculated for a typical field test of a standard Davis Gun penetrator impacting antelope tuff

The ABAQUS/cavity expansion procedure can now be applied to phase 3 penetrator development and testing to predict the trajectory, structural response, and component shock environment. The distributed loading determined with this procedure can be used as input to a more detailed penetrator model;

e.g., one which represents the case with shell elements and accounts for circumferential variation of the loading.

ABAQUS STRUCTURAL MODEL OF A PENETRATOR

An ABAQUS structural model that represents lateral bending stiffness of a penetrator with B21 pipe elements is used. This representation of the standard Davis Gun penetrator with a 6.0 CRH (caliber radius head) nose is shown in Figure 2. Parameter values of the structural model are given in Table 1.

Table 1. Parameters of the Structural Model of the Standard Davis Gun Penetrator.

DoD
MCTL
b(3)

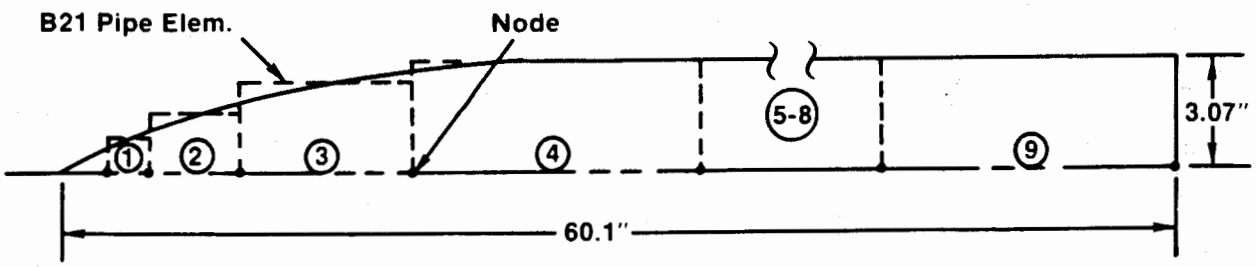

Figure 2. Structural Model of the Standard Davis Gun Penetrator.

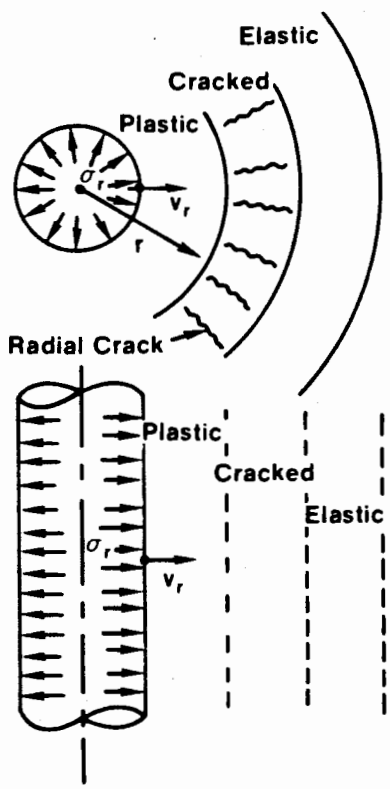

Figure 3. Expanding Cylindrical Cavity and Surrounding Response Regions.

DOE
MCTL
b(3)

SPECIFICATION OF DISTRIBUTED LOADING VIA CAVITY EXPANSION RESULTS

A DLOAD subroutine was written to specify the distributed axial and lateral loads on a penetrator entering a target when both the angle of attack α and the angle of incidence β are nonzero. The subroutine uses the theory developed in the Appendix that gives the distributed loads in the horizontal and vertical directions in terms of either cylindrical or spherical cavity expansion results and element nodal velocities and rotations.

DOE
MCTL
b(3)

Figure 4. Cylindrical Cavity Expansion Stress in Antelope Tuff.

calculated with the GNOME penetration code and with independent closed-form analysis [8]. Other results of the model verify the required symmetry in angle of attack and in angle of incidence.

RESULTS FOR THE STANDARD DAVIS GUN PENETRATOR

Results were calculated with ABAQUS for a typical test in which the standard Davis Gun penetrator impacted antelope tuff

(Figure 5). A true scale deformed configuration plot of the penetrator centerline is shown for three times.

DOD
MCTL
b(3)

DOD
MCTL
(3)

DOD
MCIL
b(3)

DOD
MCTL
b(5)

b(3)

CALCULATED AND MEASURED ACCELERATION

DOD
MCTL
b(3)

This acceleration was calculated with the ABAQUS/cavity expansion procedure. An ABAQUS bending model consisting of eleven B21 elements was used. Element thicknesses were the same as the actual case thicknesses. The internal distributed mass was accounted for by specifying appropriate densities of the various sections of the steel case.

DOD
MCTL
(3)

DOD
MCT L
b(3)

DOD
MCTL
b(3)

filter frequency. Some uncertainties that could contribute to the difference in calculated and measured acceleration are the angle of attack at impact (it was determined only at rest in the Davis Gun), neglecting frictional effects, the target material properties, and the penetrator structural modeling (for example, in the representation of the mass distribution by artificially high case densities).

CONCLUSIONS

A calculational procedure has been developed that determines the distributed lateral forces on earth penetrators with bending flexibility and their trajectories for oblique impacts. The procedure requires relatively short computation times and is suitable for support of penetrator design and testing. Results for a standard Davis Gun penetrator a

REFERENCES

1. L.M. Taylor and D.P. Flanagan, PRONTO 3D a Three-Dimensional Transient Solid Dynamics Program, SAND87-1912, Sandia National Laboratories, Albuquerque, NM, March 1989.

2. E.D. Reedy, 1522, "PRONTO 3D Penetration Calculations," internal memo, Sandia National Laboratories, Albuquerque, NM, May 18, 1989.

3. N.T. Davie and M.A. Richgels, GNOME: An Earth Penetrator Code, SAND82-2358, Sandia National Laboratories, Albuquerque, NM, May 1983.

4. B.J. Kipp, 1522, private communication, Sandia National Laboratories, Albuquerque, NM, June 27, 1988.

5. P.P. Stirbis, 1522, and T.G. Priddy, 7542, private communication, Sandia National Laboratories, Albuquerque, NM, April 1981.

6. D.B. Longcope, 1524, "Penetration Benchmark Calculations Done with GNOME and the SIG5 Pressure Subroutine," internal memo, Sandia National Laboratories, Albuquerque, NM, Nov. 2, 1987.

7. D.B. Longcope, The Prediction of Loads on Penetrators into Rock via the Spherical Cavity Expansion Approximation, SAND87-0959, Sandia National Laboratories, Albuquerque, NM, May 1990.

8. D.B. Longcope, 1524, "Comparison of GNOME and ABAQUS Results for a Typical Normal Penetration Event," internal memo, Sandia National Laboratories, Albuquerque, NM, June 16, 1989.

9. W.R. Wood, 5144, Davis Gun Barrel Pressure and Earth Penetrator Data DG6-28, test report, Sandia National Laboratories, Albuquerque, NM, Nov. 6, 1980.

10. C.R. Adams, GRAFAID Code User Manual Version 2.0, SAND 84-1725, Sandia National Laboratories, Albuquerque, NM, September 1985.

11. W.R. Wood, 5144, private communication, Sandia National Laboratories, Albuquerque, NM, April 1989.

12. T.R. Kane, Dynamics, 3rd edition, Stanford, California, January 1978, p.76.

APPENDIX

Kinematics

The definitions of the coordinate system and vectors that describe the kinematics of the finite elements of a penetrator structural model are shown in Figure 14. The vertical coordinate y is in the direction normal to the target surface, which is assumed planar, and x is the horizontal coordinate. The unit vectors are $\hat{i}$, $\hat{j}$, and $\hat{k} = \hat{i} x \hat{j}$ in the x, y, and z directions, respectively.

DOD METL b6

DOD
MCTL
b(3)

Distributed Forces on the Aft Body

DOD
MCTL
(C3)

DOD
MCTL
b(6)

DCD
MCIL
D/3

DOD
MCTL
V 13

DOD
MCH
b(3)

DOD
MAT
b(3)

Distribution:

1425	J. H. Biffle
1500-A	L. W. Davison
1510	J. C. Cummings
1514	E. P. Chen
1514	H. S. Morgan
1540	J. R. Asay
1542	P. Yarrington
1544	R. C. Reuter, Jr.
1544	E. D. Reedy
1545	D. R. Martinez
1545	D. B. Longcope (10)
1550	C. W. Peterson
3141	S. A. Landenberger (5)
3145	Document Processing (8)
3151	G. L. Esch (3)
5110	C. C. Burks
5111	W. J. Patterson
7111	T. K. Bergstresser
7542	T. G. Priddy
7542	V. I. Bateman
9122	R. R. Beasley
9122	M. M. Hightower
9123	J. M. Holovka
9123	M. J. Forrestal (10)
9123	V. K. Luk
9123	C. W. Young
9123	E. R. Young
8524	J. A. Wackerly

Francois Heuze, L-200
LLNL
Livermore, CA 94550

Prof. H. L. Schreyer
Mechanical Engineering Department
University of New Mexico
Albuquerque, NM 87131